

Stark 4R15-DE

Explosion Proof Seismic Air Compressor

- True "Free Air Delivery" (FAD) - 15 CFM @ 6,000 PSI
- Diesel Engine – 24.8 HP @ 1800 RPM @ 100% duty cycle
- Fuel capacity – about 5 gallons (7 to 8 hours run time)
- Air cooled compressor and engine
- Engine controls & vibration type hour meter
- Forestry service spark arresting muffler
- Run-away engine shutdown system
- Wind-up mechanical engine starter (No battery & No air required)
- Gauge panel, (inter-stages and oil pressure)
- Low engine oil pressure shutdown system
- High air pressure final relief valve
- Direct Drive, no belts, extremely smooth operation
- Oil level sight glass, no dip stick required
- Manual condensate drain system
- Drip pan for offshore service
- Dimensions – 37" x 60" x 50" high, weight - 1275 pounds

Option for Breathing Air Applications:


APA-58 Purifier system, (Trap & 2 tall chambers)

Training at Stark Industries is free

This package is **totally free of electrical controls** for more reliable offshore service - - - no battery, no alternator, no switches.

Stark Industries

6511 Mapleridge Houston, TX 77081

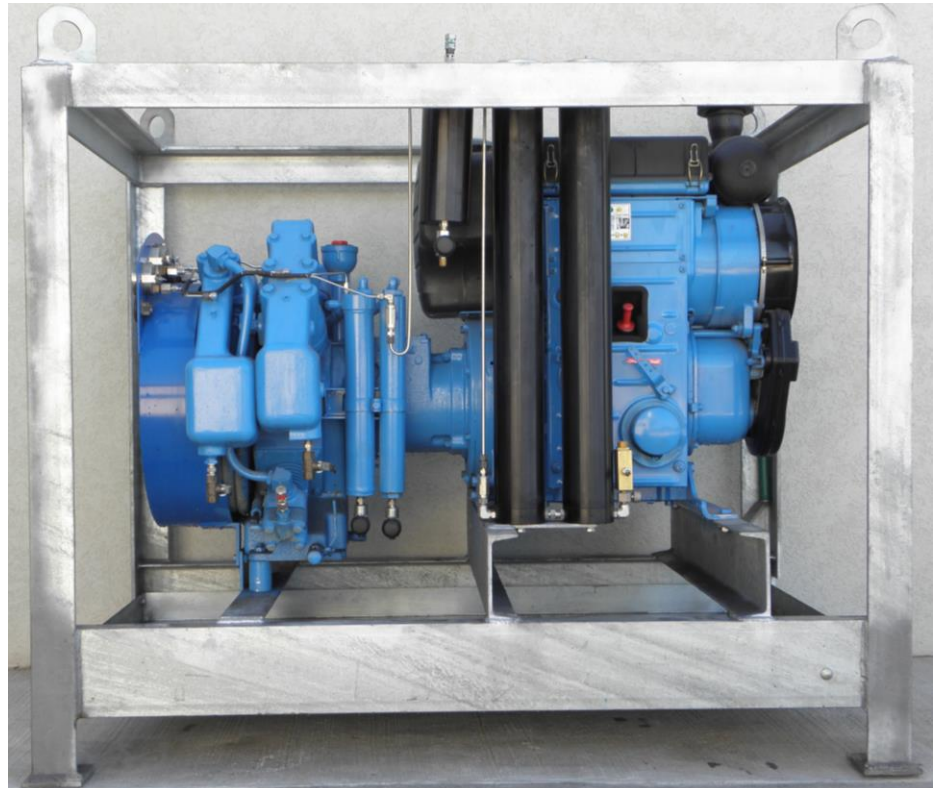

Stark Model 4R15-DE



713-592-0377

888-713-4444

Fax 592-8055